

## ASSEMBLY INSTRUCTIONS

### Connery 40" Ring Chandelier


Item # CHC 1616EU

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

#### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Cutters
Wire Strippers	Measuring Tape	Pencil
Drill	Hammer	

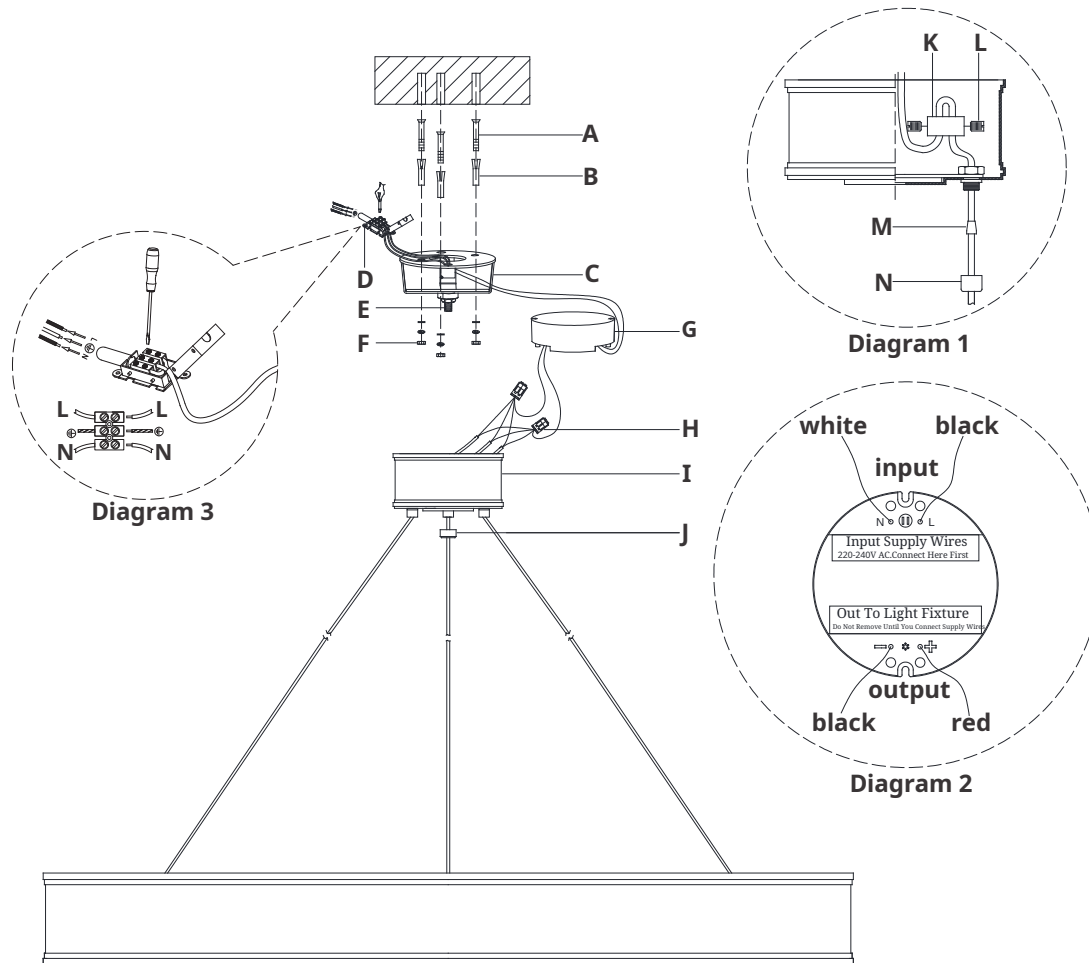

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (C) from canopy (I) by removing finial (J).
3. Using the mounting plate (C) as a guide, line up with the ceiling and mark expansion anchors positions.
4. Using a drill bit slightly smaller than the expansion anchors, drill holes in the marked positions. Install expansion anchors (B) and screws (A) into the holes using hammer.
5. Line up mounting plate (C) to expansion anchors and add washers, lock washers and mounting nuts (F). Secure by tightening mounting nuts.
6. To adjust each hanging wire loosen the screws (L) on either side of wire stop (K) and adjust to desired length. Once complete re-secure screws (L) and repeat steps with the remaining wires. (see diagram 1)
7. After fixture height is achieved shorten the wires by using a pair of cutters (not included), leaving 8" of wire length to connect to driver (G).  
**NOTE:** Final leveling in later step will only allow for small adjustments. Make sure fixture height and fixture level are accurate before cutting wires.

## ASSEMBLY INSTRUCTIONS

## Connery 40" Ring Chandelier

Item # CHC 1616EU

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

8. Remove outer housing of wire by making a neat cut all the way around, about 2.5 cm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.

**NOTE:** Make sure not to cut too deep into housing or electrical wires could become damaged.

9. Separate wires, and strip insulation on each 6 mm.
10. Connect fixture neutral wires (black) to driver output neutral wire (black) using wire nut (H).
11. Connect fixture hot wires (red) to driver output hot wire (red) using wire nut (H). (see diagram 2)
12. Open terminal block (D) to prepare for installation of electrical wires. Use diagram 3 to reference electrical installation steps below.
13. Connect fixture ground (green) and supply ground (usually green or yellow) to terminal block (D) and secure with screws.
- NOTE:** It is imperative that the fixture is grounded.
14. Connect neutral wires (blue) to terminal block (D) and secure with screws.
15. Connect hot wires (brown) to terminal block (D) and secure with screws. Close terminal block (D).
- CAUTION:** Do not reverse the hot and neutral connections.
16. Insert driver (G) into mounting plate bracket.
17. Install canopy (I) to mounting plate (C) by securing with finial (J).
18. To level fixture, unscrew cap nut (N), feed fixture wire through stopper (M) and then re-secure cap nut (N). Repeat as needed with other wires.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

