


ASSEMBLY INSTRUCTIONS

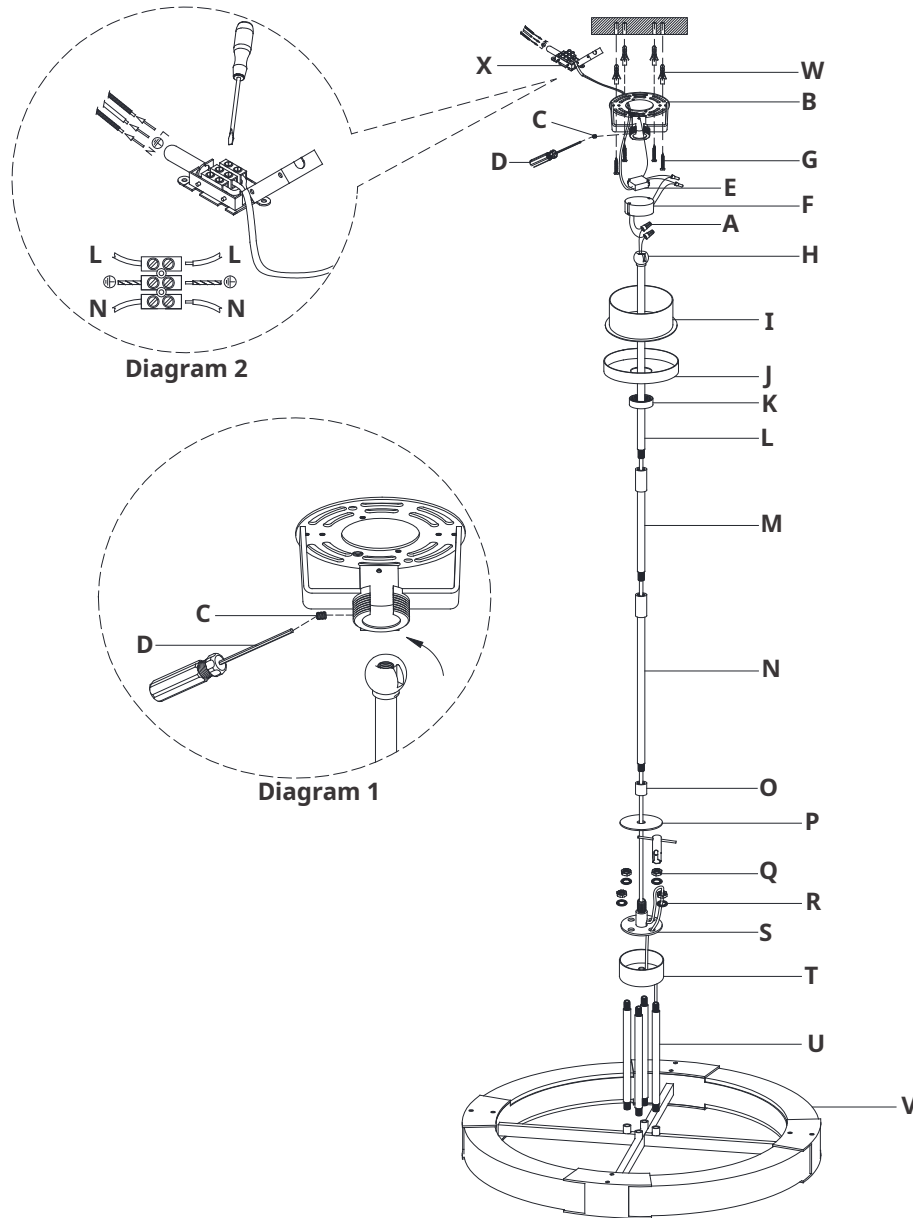

Covet Medium Ring Chandelier

Item # KW 5138-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Cutters
Wire Strippers	Hammer	Drill
Pencil	Slip-joint pliers	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (B) from driver housing (I) and canopy (J) by removing collar ring (K).
3. Using mounting plate (B) as a guide, line up with the ceiling and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (W) into the holes using hammer.
5. Install mounting plate (B) to ceiling and secure with wood screws (G) to anchors (W).
6. Thread rods (U) to fixture body (V).
7. Let rods (U) pass through hub (T) and metal plate (S) and secure with washers (R) and hex nuts (Q) using provided wrench.
8. Install metal cap (P) to hub (T) and secure with connector (O).
9. Feed electrical wires through bottom rod (N) and thread to connector (O). Repeat for middle rod (M), connecting to bottom rod (N).
10. Continue feeding wires through collar ring (K), canopy (J), driver housing (I) and top rod (L).
11. Holding fixture upright, slide collar ring (K), canopy (J), driver housing (I) down bottom rods (N) and rest on metal cap (P). Then connect top rod (L) to middle rod (M).

NOTE: Slide components down slowly to avoid damages.

ASSEMBLY INSTRUCTIONS

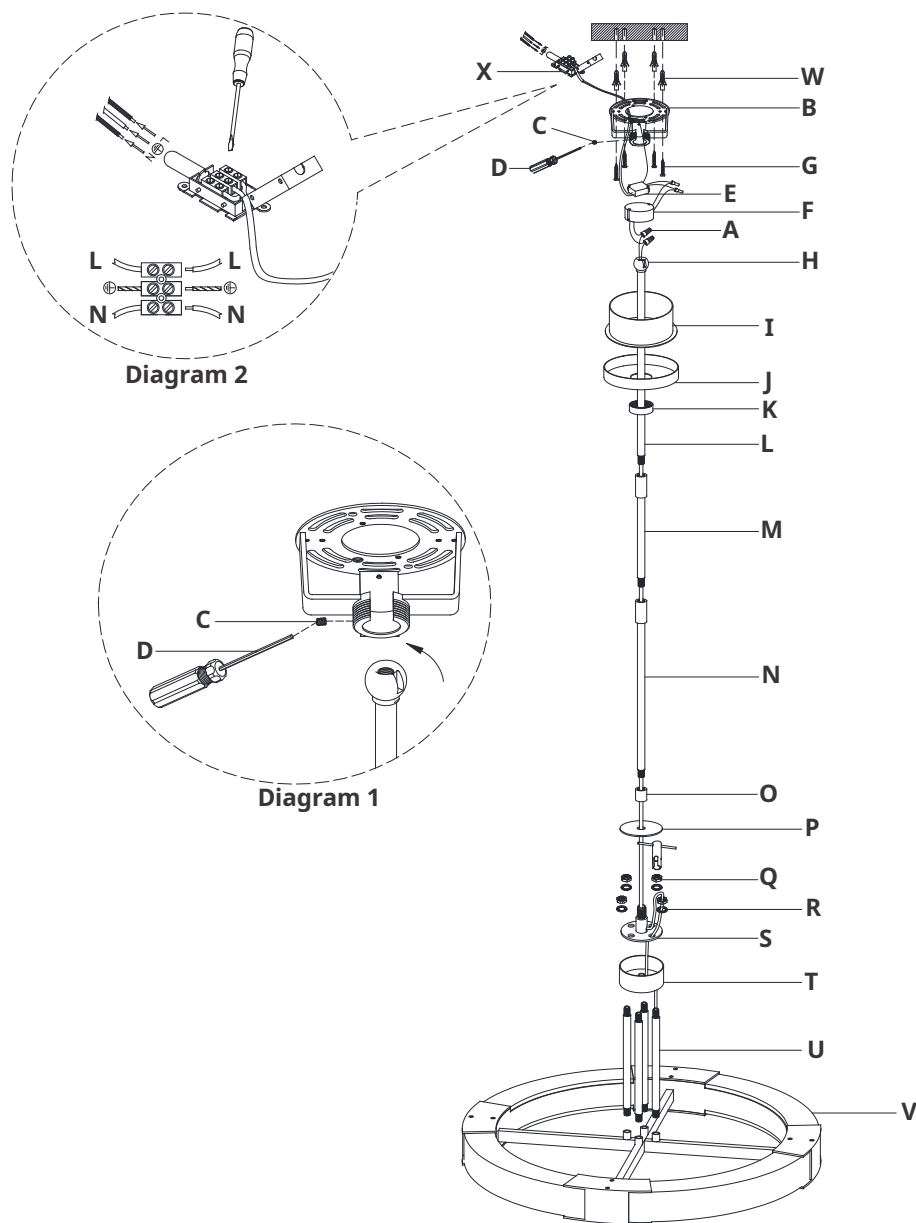

Covet Medium Ring Chandelier


Item # KW 5138-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

12. Hang fixture swivel ball (H) to the center of tall mounting plate (B) and secure with set screw (C) using provided screwdriver (D). See diagram 1.
13. Cut excess wires, being sure to leave enough to connect terminal block (X).
14. Remove outer housing of wire by making a neat cut all the way around, about 2.5 cm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.
NOTE: Make sure not to cut too deep into housing or electrical wires could become damaged.
15. Separate wires, and strip insulation on each 6 mm.
16. Connect fixture neutral wire (black) to driver (F) output wire (black) using wire nut (A).
17. Connect fixture hot wire (red) to driver (F) output wire (red) using wire nut (A).
CAUTION: Do not reverse the hot and neutral connections.
18. Open terminal block (X) to prepare for installation of electrical wires. Use diagram 2 to reference electrical installation steps below.
19. Connect fixture ground wire (green) and supply ground wire (usually green or yellow) to terminal block (X) and secure with screws.
NOTE: It is imperative that the fixture is grounded.

ASSEMBLY INSTRUCTIONS

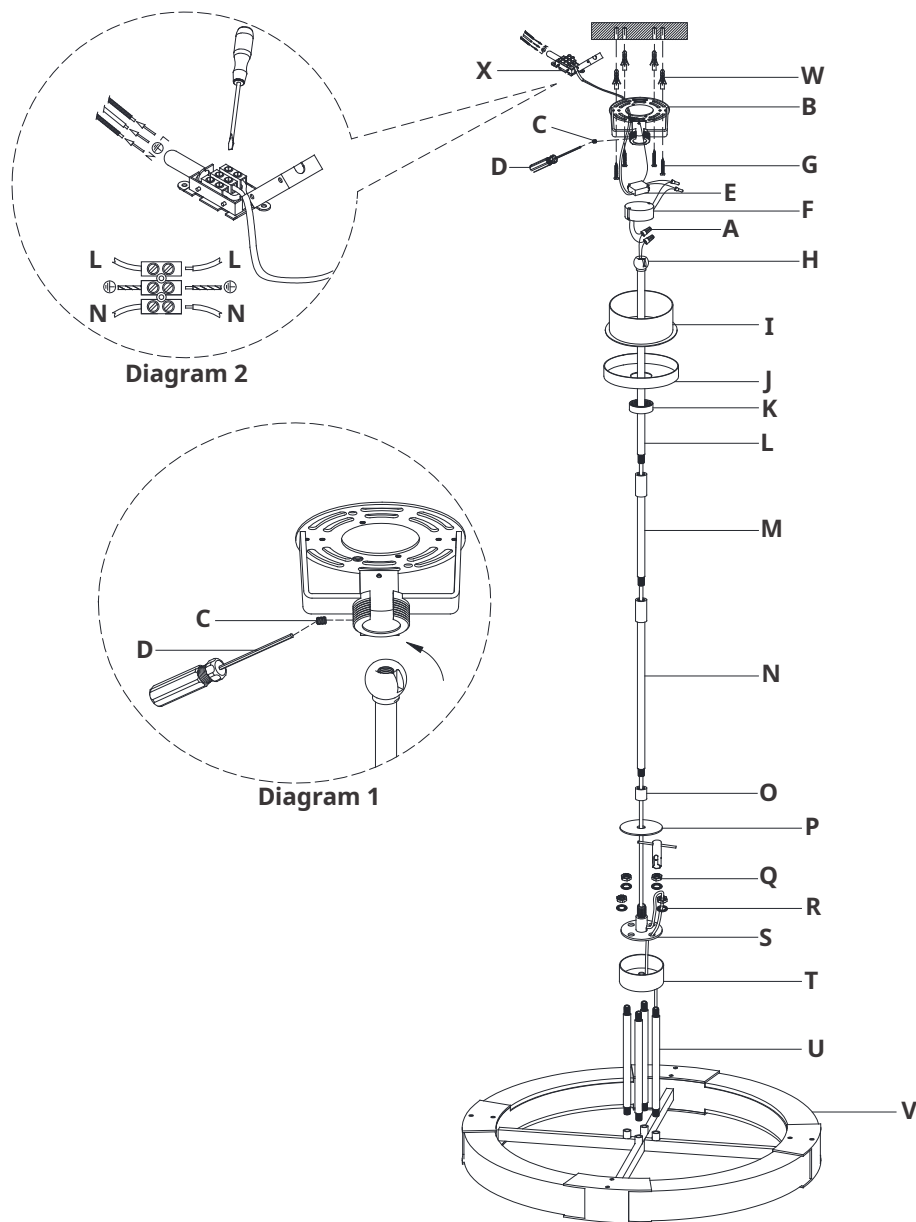

Covet Medium Ring Chandelier

Item # KW 5138-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

20. Connect filter (E) input neutral wire (blue) to terminal block (X) and secure with screws.

21. Connect filter (E) input hot wire (brown) to terminal block (X) and secure with screws. Close terminal block (X).

CAUTION: Do not reverse the hot and neutral connections.

22. Insert filter (E) and driver (F) into the center of mounting plate (B).

23. Install driver housing (I) and canopy (J) to mounting plate (B) and secure with collar ring (K).

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.