

ASSEMBLY INSTRUCTIONS

Fresno Medium 2-Light 3/4 Wall Lantern

Item # CHO 2935-EU


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

| | | |
|----------------------|---------------------|-------|
| Phillips Screwdriver | Slotted Screwdriver | Drill |
| Pencil | Hammer | |

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (B) from fixture (G) by removing screws (F).
3. Using mounting plate (B) as a guide, line up with the wall and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (A) into the holes using hammer.
5. Line up mounting plate (B) to wall anchors and secure with wood screws (C).
6. Open terminal block (O) to prepare for installation of electrical wires. Use diagram 1 to reference electrical installation steps below.
7. Connect fixture ground (green) and supply ground (usually green or yellow) to terminal block (O) and secure with screws.
NOTE: It is imperative that the fixture is grounded.
8. Connect neutral wires (blue) to terminal block (O) and secure with screws.
9. Connect hot wires (brown) to terminal block (O) and secure with screws. Close terminal block (O).
- CAUTION:** Do not reverse the hot and neutral connections.
10. Install fixture (G) to mounting plate (B) and secure with screws (F).

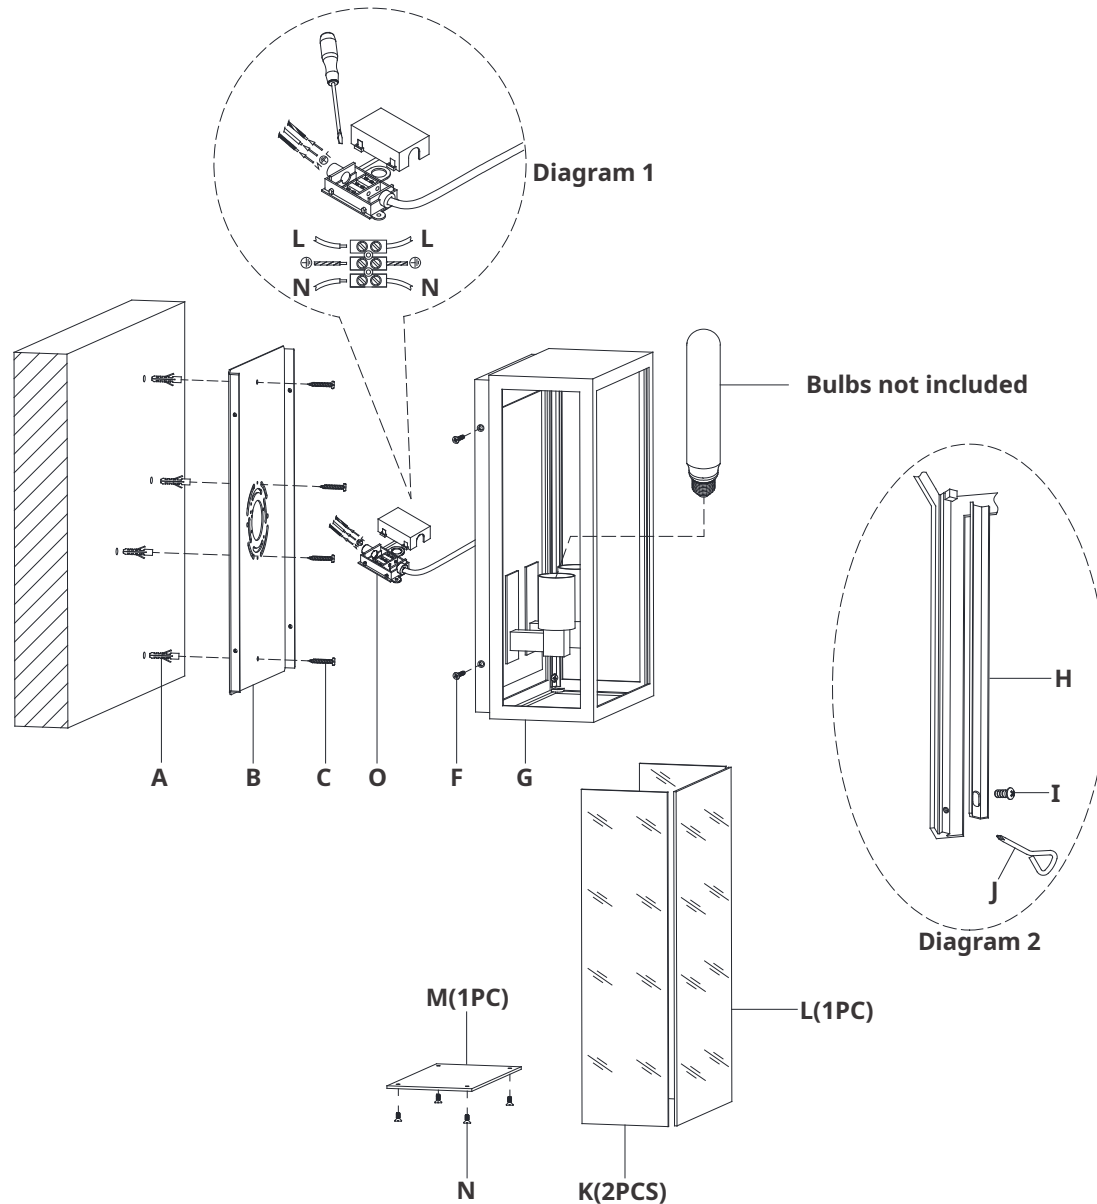

ASSEMBLY INSTRUCTIONS

Fresno Medium 2-Light 3/4 Wall Lantern

Item # CHO 2935-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Install light bulbs into the sockets.
12. Remove metal bars (**H**) from fixture frame by removing screws (**I**) as shown in diagram 2.
14. Install glass panels (**K**) to fixture frame by securing with metal bars (**H**) and screws (**I**) using provided wrench (**J**).
15. Install glass panel (**L**) to fixture frame by securing with metal bars (**H**) and screws (**I**) using provided wrench (**J**).
16. Install metal panel (**M**) to fixture frame and secure with screws (**N**).

FOR OUTDOOR/WET LOCATION INSTALLATION:

17. Using silicon compound, apply a small bead where backplate meets the wall to prevent water from entering.

NOTE: Large gaps will need to be corrected before applying silicon compound.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

