


ASSEMBLY INSTRUCTIONS

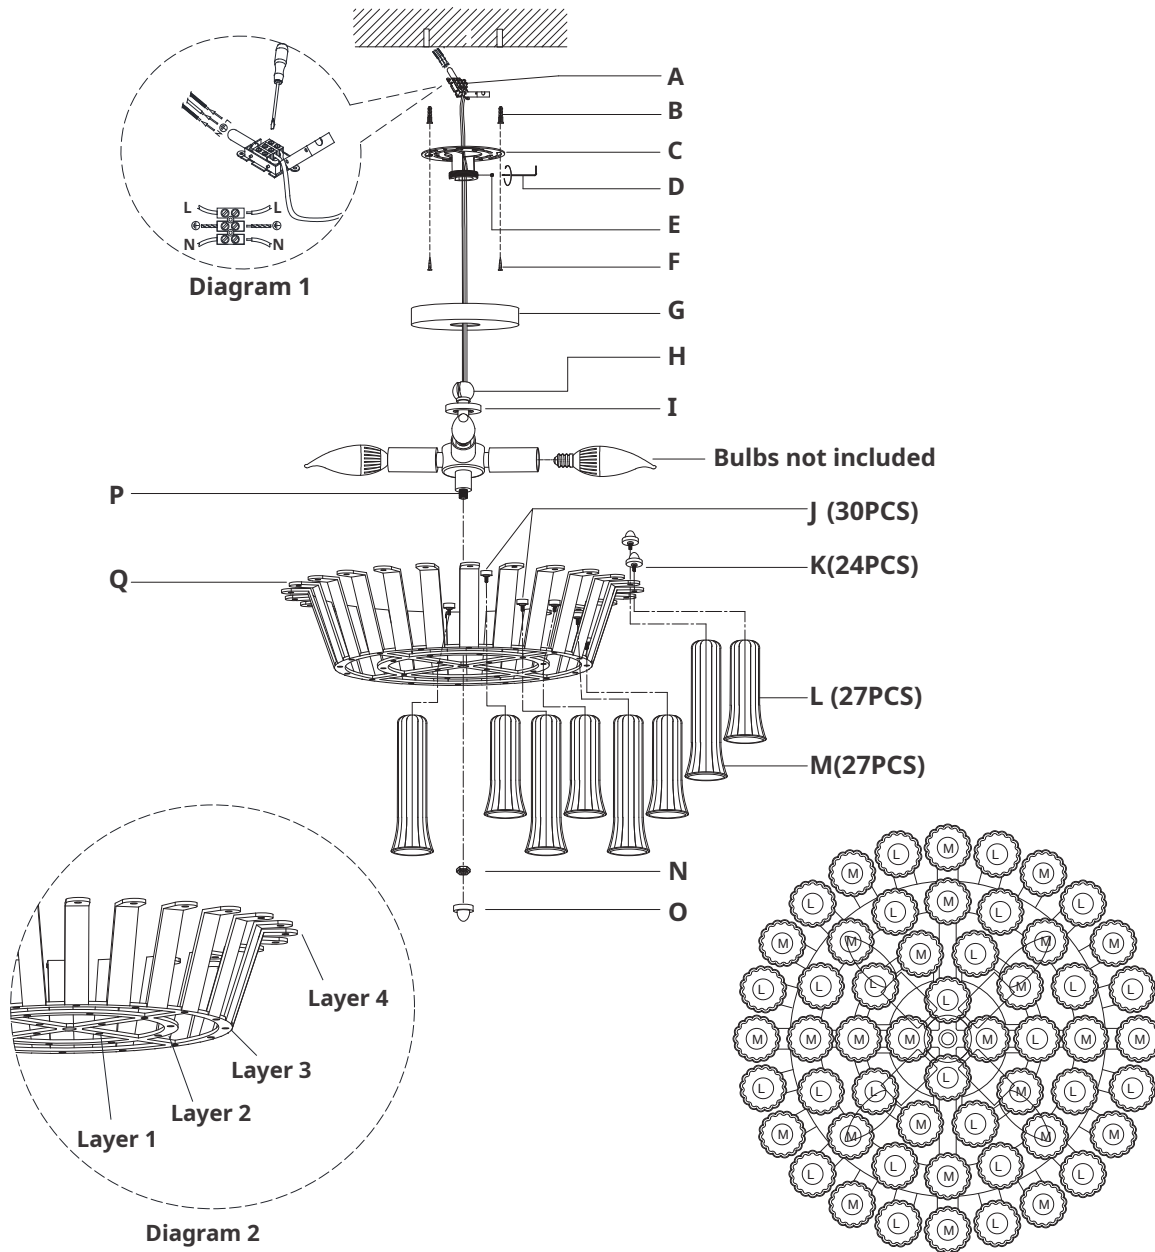

Lorelei 18" Semi-Flush Mount

Item # JN 4250EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver

Slotted Screwdriver


Drill

Pencil

Hammer

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(C)** from canopy **(G)** by removing collar ring **(I)**.
3. Using mounting plate **(C)** as a guide, line up with the ceiling and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(B)** into the holes using hammer.
5. Install mounting plate **(C)** to ceiling and secure with wood screws **(F)** to anchors **(B)**.
6. Feed wires through collar ring **(I)** and canopy **(G)**, carefully resting on top of fixture body.
7. Hang fixture swivel ball **(H)** to the center of mounting plate **(C)** and secure with set screw **(E)** using provided wrench **(D)**.
8. Cut excess wires, being sure to leave enough length to connect the terminal block **(O)**.
9. Remove outer housing of wire by making a neat cut all the way around about 2.5 cm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.
NOTE: Make sure not to cut too deep into housing or electrical wires could become damaged.
10. Separate wires, and strip insulation on each 6 mm.

ASSEMBLY INSTRUCTIONS

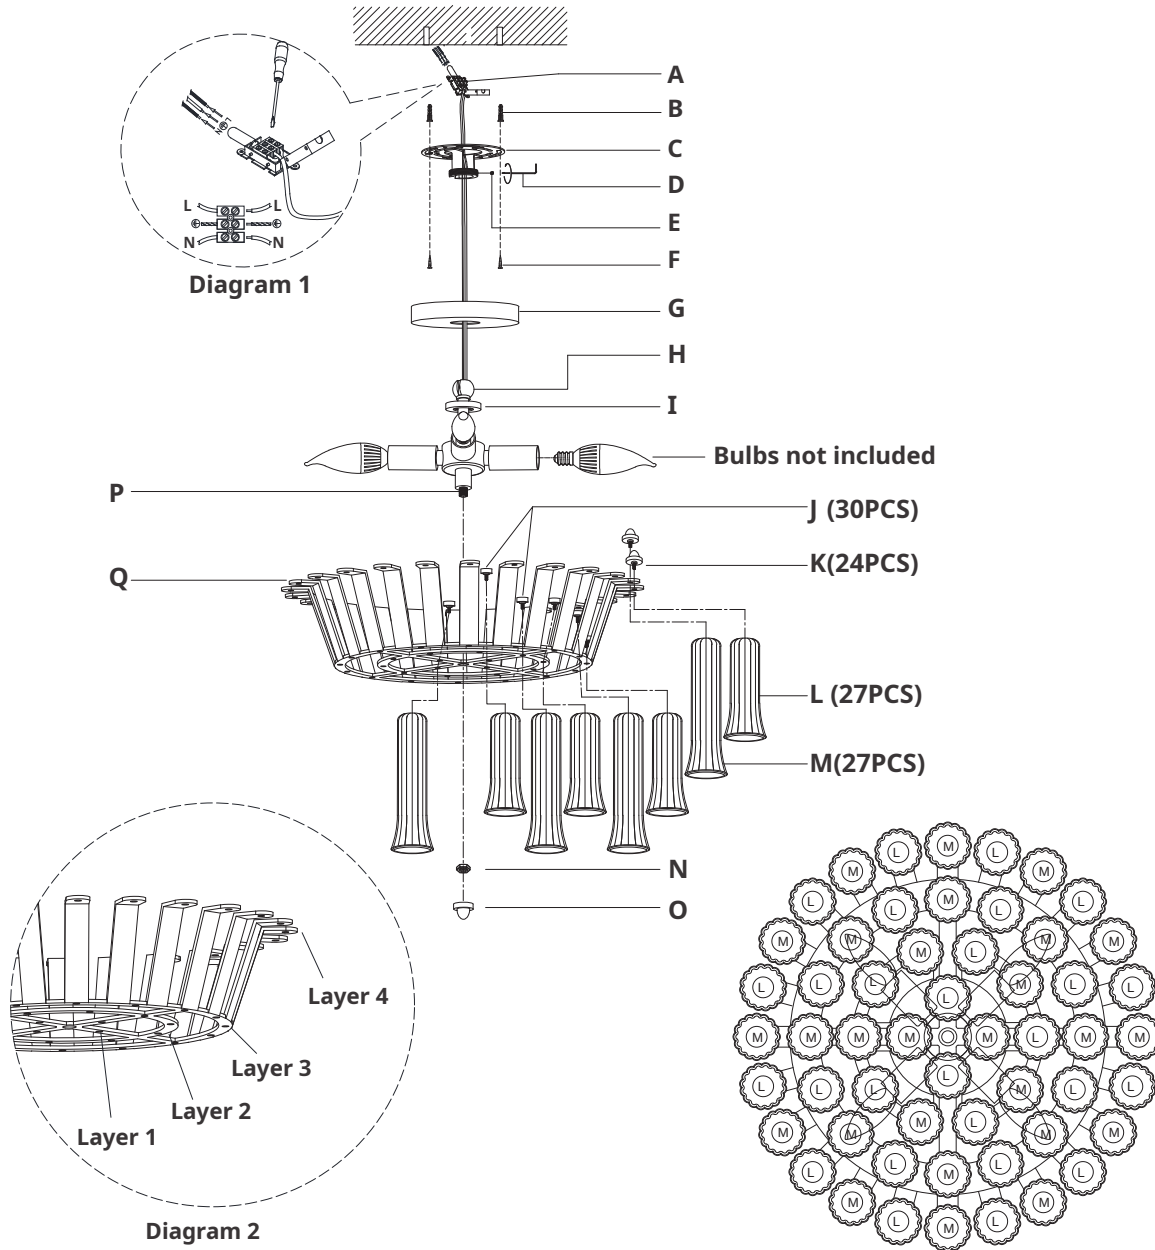

Lorelei 18" Semi-Flush Mount

Item # JN 4250EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- Open terminal block **(A)** to prepare for installation of electrical wires. Use diagram 1 to reference electrical installation steps below.
- Connect fixture ground (green) and supply ground (usually green or yellow) to terminal block **(A)** and secure with screws.
NOTE: It is imperative that the fixture is grounded.
- Connect neutral wires (blue) to terminal block **(A)** and secure with screws.
- Connect hot wires (brown) to terminal block **(A)** and secure with screws. Close terminal block **(A)**.
CAUTION: Do not reverse the hot and neutral connections.
- Install canopy **(G)** to mounting plate **(C)** and secure with collar ring **(I)**.
- Install light bulbs into the sockets.
- Install fixture frame **(Q)** to threaded nipple **(P)** and secure with hex nut **(N)** and threaded cap **(O)**.
- Install glass shades to each tier starting with shade **(M)** and alternating with shade **(L)**. Secure shades using threaded caps **(J & K)**.
NOTE: Install glass shades starting from layer 1 and working your way to layer 4. (see diagram 2)

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.