


## ASSEMBLY INSTRUCTIONS

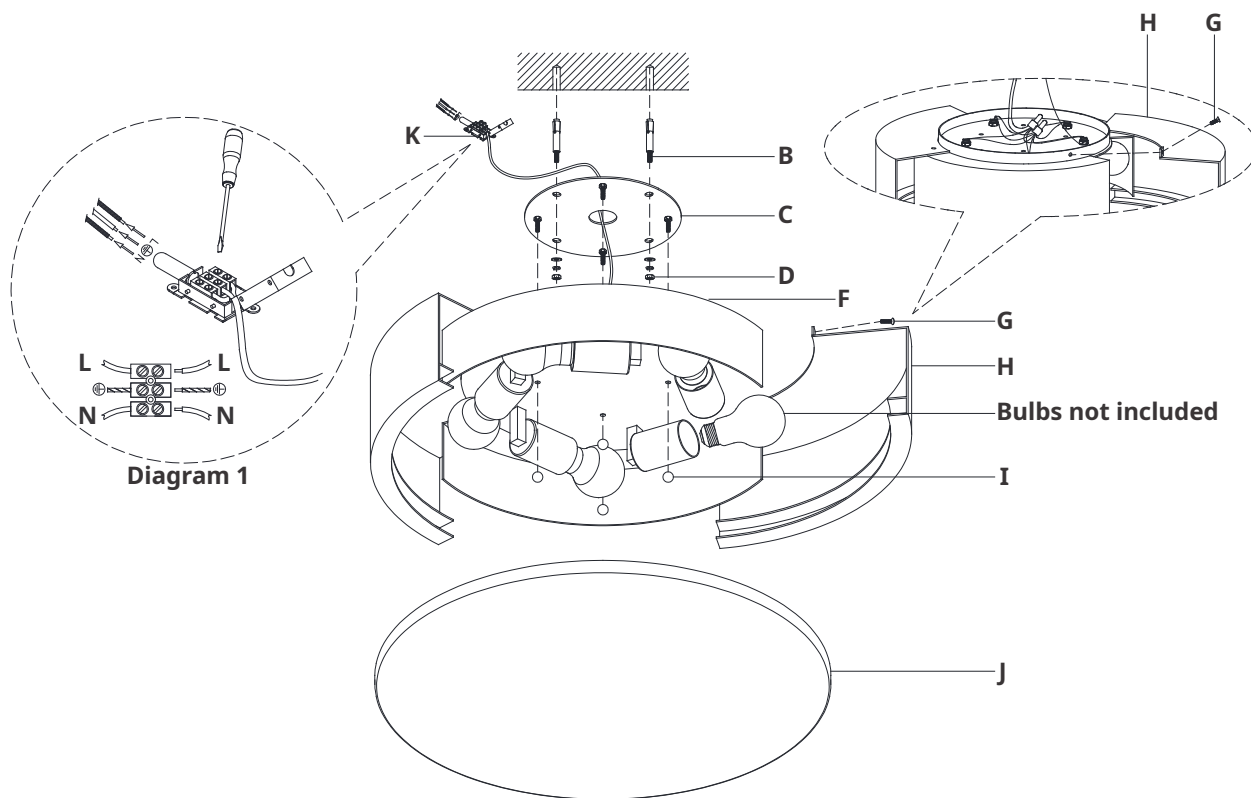

### Melange X-Large Flush Mount

Item # KW 4016-EU

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


#### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Pencil	Hammer
Slotted Screwdriver	Drill	Wire Strippers
Wire Cutters		

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (C) from alabaster bracket (F) by removing threaded caps (I).
3. Using mounting plate (C) as a guide, line up with the ceiling and mark expansion anchors positions.
4. Using a drill bit slightly smaller than the expansion anchors, drill holes in the marked positions. Install expansion anchors and screws (B) into the holes using hammer.
5. Line up mounting plate (C) to expansion anchors and add washers, lock washers and mounting nuts (D). Secure by tightening mounting nuts.
6. Remove outer housing of wire by making a neat cut all the way around, about 2.5 cm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.  
**NOTE:** Make sure not to cut too deep into housing or electrical wires could become damaged.
7. Separate wires, and strip insulation on each 6 mm.
8. Open terminal block (K) to prepare for installation of electrical wires. Use diagram 1 to reference electrical installation steps below.
9. Connect fixture ground (green) and supply ground (usually green or yellow) to terminal block (K) and secure with screws.

**NOTE:** It is imperative that the fixture is grounded.

## ASSEMBLY INSTRUCTIONS

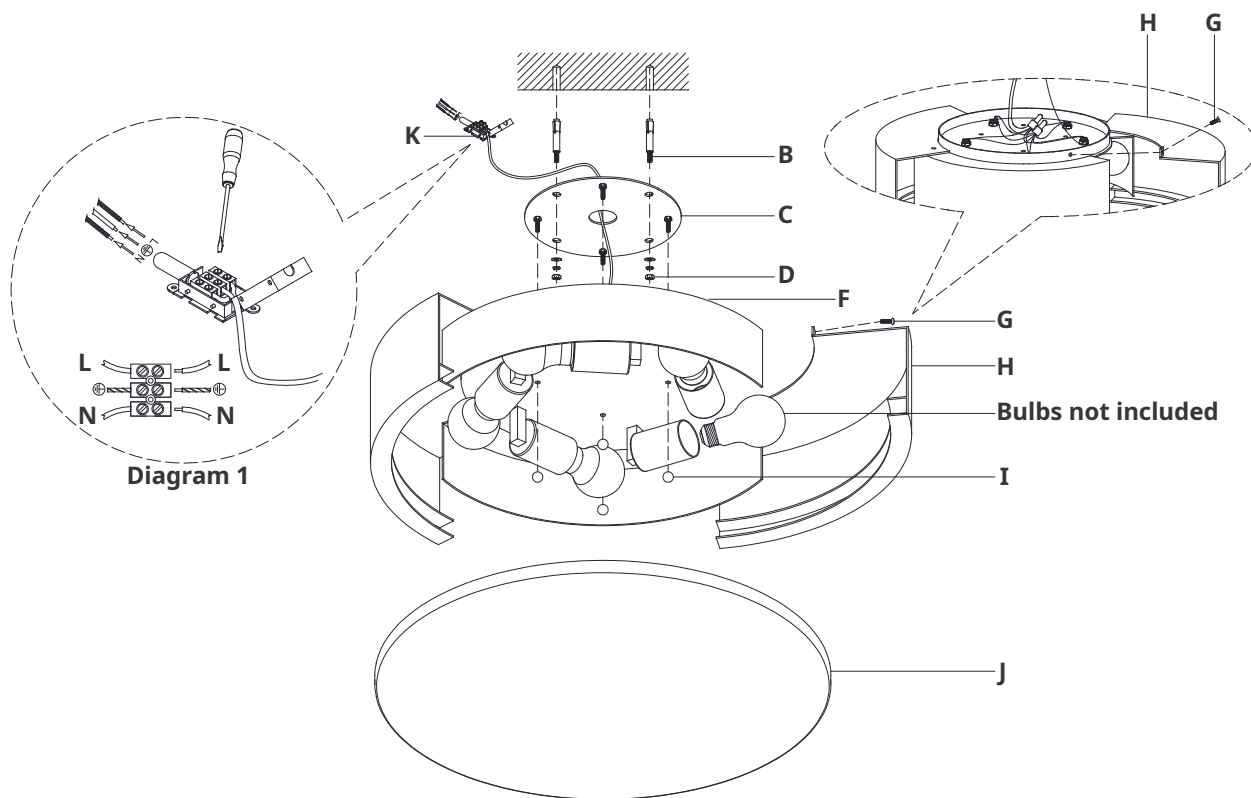

## Melange X-Large Flush Mount

Item # KW 4016-EU

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Connect neutral wires (blue) to terminal block (K) and secure with screws.
11. Connect hot wires (brown) to terminal block (K) and secure with screws. Close terminal block (K).  
**CAUTION:** Do not reverse the hot and neutral connections.
12. Install fixture body (F) to mounting plate (C) and secure with threaded caps (I).
13. Install light bulbs into sockets.
14. Open side of alabaster bracket (H) by locating and removing screw (G) using screwdriver.  
**NOTE:** Keep screwdriver and screw (G) within reach for next step.
15. Carefully insert alabaster diffuser (J) into groove on alabaster bracket (H), then close side of alabaster bracket (H) and secure with screw (G).  
**NOTE:** Carefully support weight of alabaster diffuser, making sure screw (G) is secure before removing support.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do Not use abrasive or chemical agents.