
ASSEMBLY INSTRUCTIONS

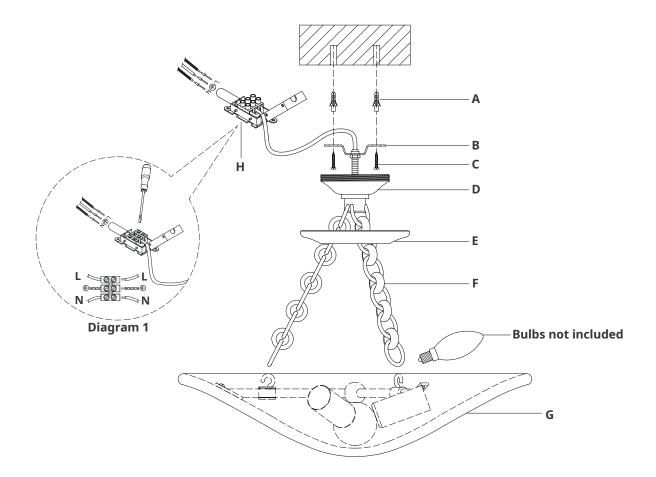

Mollino 16" Semi Flush Mount

Item # ARN 4425-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):


Phillips Screwdriver Pencil Hammer
Slotted Screwdriver Drill Wire Strippers
Wire Cutters Measuring Tape

- 1. Carefully remove all parts from the box. Place on a clean, soft surface.
- 2. Using mounting plate **(B)** as a guide, line up with the ceiling and mark anchor positions.
- 3. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (A) into the holes using hammer.
- 4. Line up mounting plate **(B)** with ceiling anchors and secure with wood screws **(C)** to anchors **(A)**.
- 5. Secure collar loop **(D)** to mounting plate **(B)** using pliers to tighten locknut.
- 6. Thread canopy **(E)** to collar loop **(D)**.
- 7. Attach chains (F) to hooks on fixture body (G).
- 8. Thread fixture wire through chain **(F)**.
 - **NOTE**: When you reach collar loop **(D)**, ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to connect terminal block **(H)**.
- 9. Remove outer housing of wire by making a neat cut all the way around about 2.5 cm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.
 - **NOTE**: Make sure not to cut too deep into housing or electrical wires could become damaged.
- 10. Separate wires and strip insulation on each 6 mm.





ASSEMBLY INSTRUCTIONS

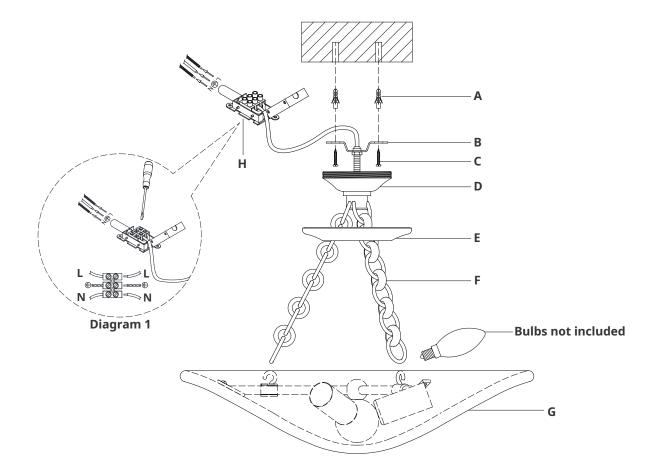

Mollino 16" Semi Flush Mount

Item # ARN 4425-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 11. Loosen canopy **(E)** and slip down chain **(F)** carefully.
- 12. Twist all fixture wires together. Slip through center hole of collar loop **(D)**.

NOTE: Untwist wires and separate to prepare for connection

- 13. Open terminal block **(H)** to prepare for installation of electrical wires. Use diagram 1 to reference electrical installation steps below.
- 14. Connect fixture ground (green) and supply ground (usually green or yellow) to terminal block **(H)** and secure with screws.
 - **NOTE:** It is imperative that the fixture is grounded.
- 15. Connect neutral wires (blue) to terminal block **(H)** and secure with screws.
- 16. Connect hot wires (brown) to terminal block **(H)** and secure with screws. Close terminal block **(H)**.

CAUTION: Do not reverse the hot and neutral connections.

- 17. Thread canopy (E) to collar loop (D).
- 18. Install light bulbs into the sockets.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.