


ASSEMBLY INSTRUCTIONS

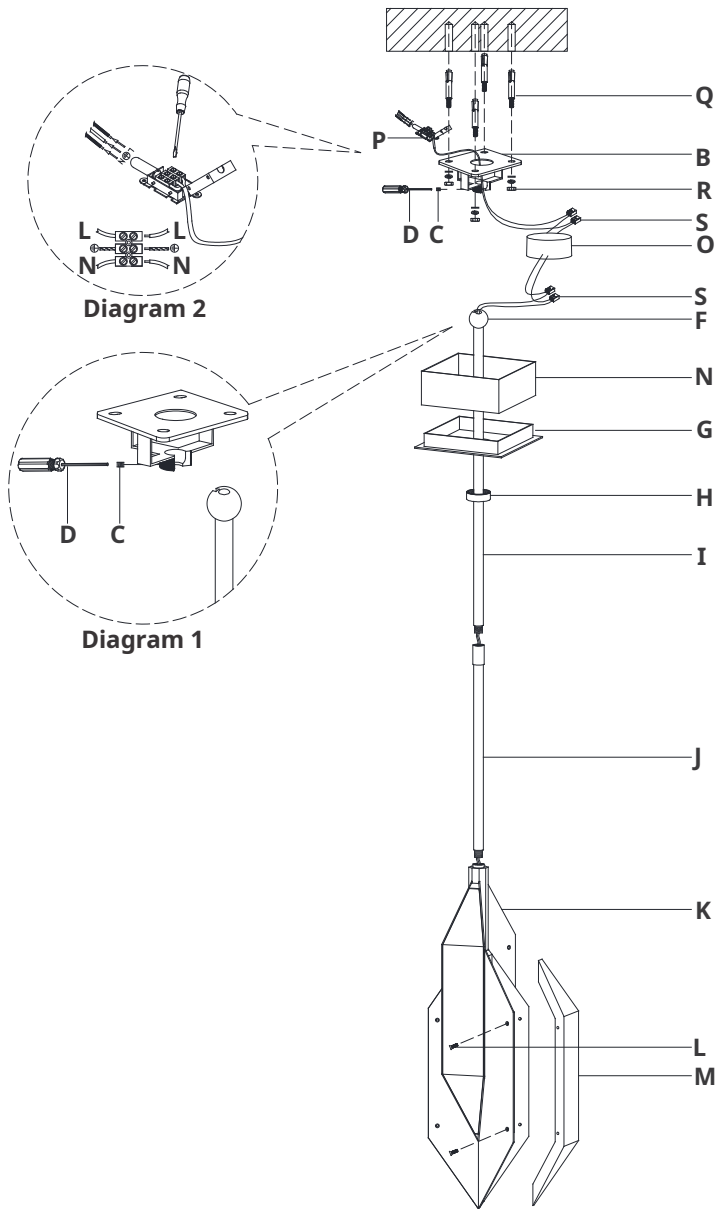

Ophelion Small Pendant

Item # KW 5721-EU

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Cutters
Wire Strippers	Hammer	Drill
Pencil		

- Carefully remove all parts from the box. Place on a clean, soft surface.
 - Remove mounting plate (B) from driver housing (N) and canopy (G) by loosening collar ring (H).
 - Using mounting plate (B) as a guide, line up with the ceiling and mark expansion anchors positions.
 - Using a drill bit slightly smaller than the expansion anchors, drill holes in the marked positions. Install expansion anchors and screws (Q) into the holes using hammer.
 - Line up mounting plate (B) to expansion anchors and add washers, lock washers and mounting nuts (R). Secure by tightening mounting nuts.
 - Install alabaster shades (M) to fixture (K) and secure with screws (L).
 - Feed electrical wires through bottom rod (J) and connect to fixture body (K).
 - Continue feeding wires through collar ring (H), canopy (G), driver housing (N) and top rod (I).
 - Holding fixture upright, slide collar ring (H), canopy (G), driver housing (N) down and rest on fixture (K). Then connect top rod (I) to bottom rod (J).
- NOTE:** Slide components down slowly to avoid damages.
- Hang fixture swivel ball (F) to center of mounting plate (B) and secure with set screw (C) using provided wrench (D). See diagram 1.

ASSEMBLY INSTRUCTIONS

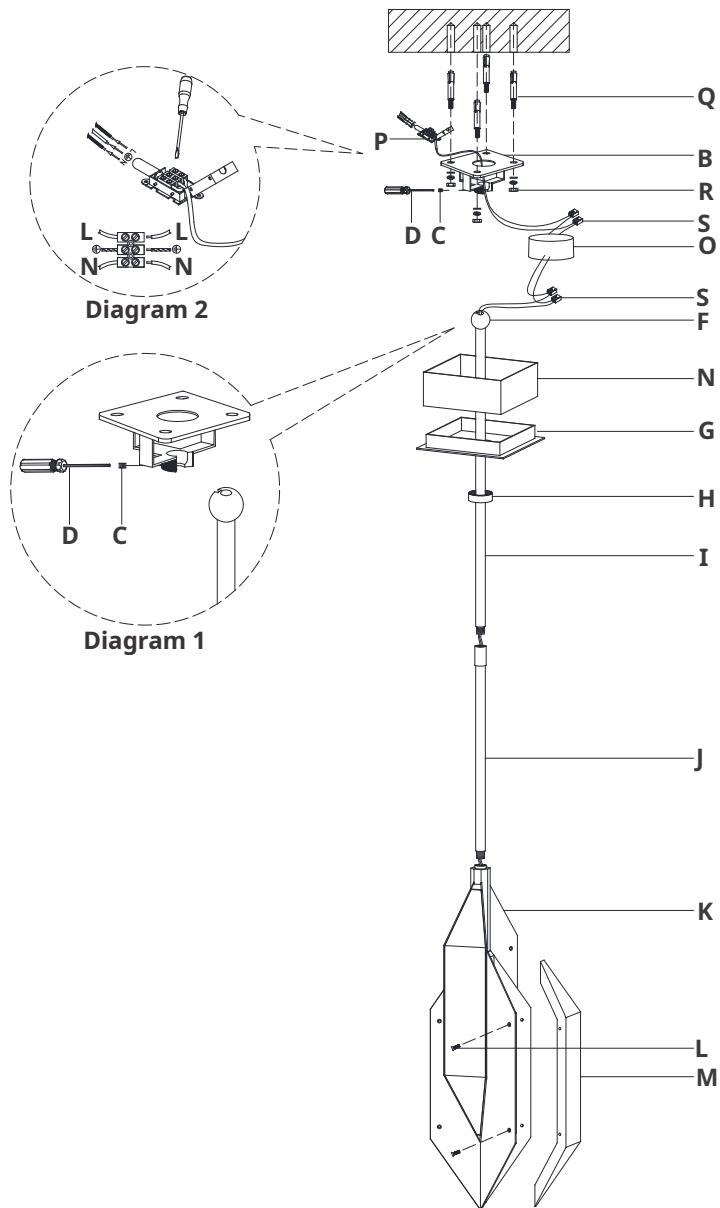

Ophelion Small Pendant

Item # KW 5721-EU


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Cut excess wires, being sure to leave enough to connect terminal block **(P)**.
12. Remove outer housing of wire by making a neat cut all the way around about 2.5 cm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.
NOTE: Make sure not to cut too deep into housing or electrical wires could become damaged.
13. Separate wires, and strip insulation on each 6 mm.
14. Connect fixture black wire to driver output black wire using wire nut **(S)**.
15. Connect fixture red wire to driver output red wire using wire nut **(S)**.
16. Connect driver input blue wire to filter output blue wire using wire nut **(S)**.
17. Connect driver input brown wire to filter output brown wire using wire nut **(S)**.
18. Open terminal block **(P)** to prepare for installation of electrical wires. Use diagram 1 to reference electrical installation steps below.
19. Connect fixture ground (green) and supply ground (usually green or yellow) to terminal block **(P)** and secure with the screws.
NOTE: It is imperative that the fixture is grounded.
20. Connect filter input wire (blue) to terminal block **(P)** and secure with the screws.
21. Connect filter input wire (brown) to terminal block **(P)** and secure with the screws. Then close terminal block **(P)**.

CAUTION: Do not reverse the hot and neutral connections.

ASSEMBLY INSTRUCTIONS

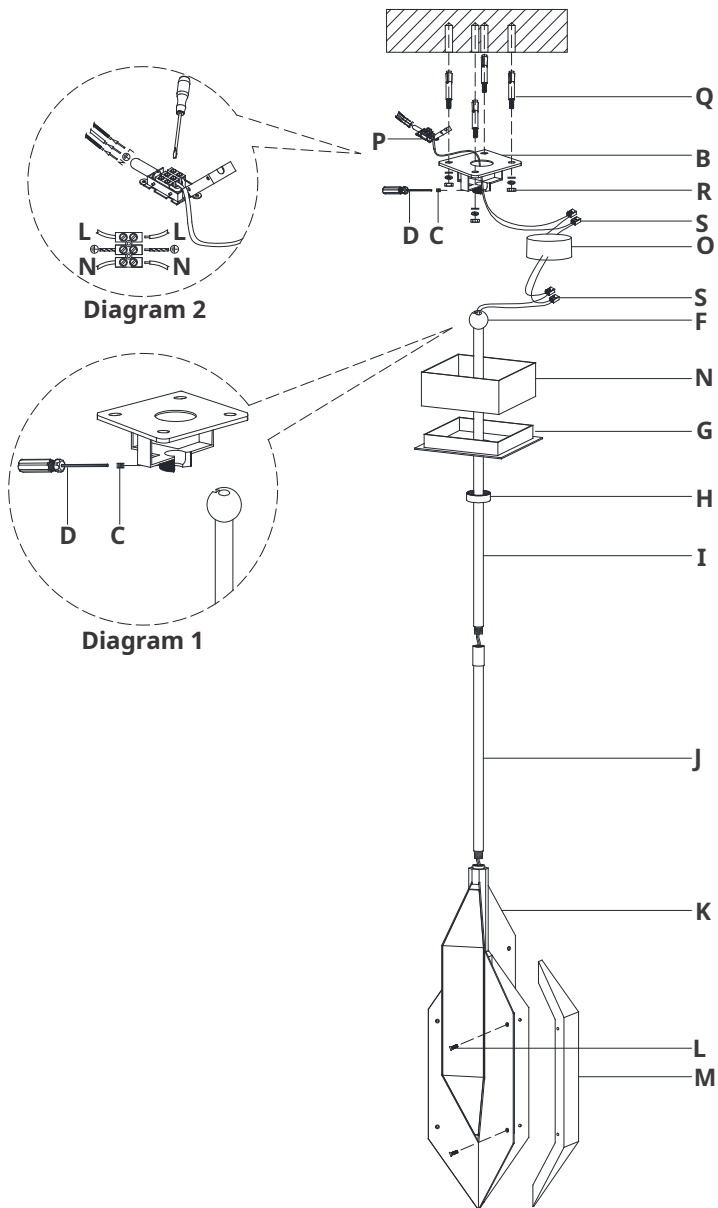

Ophelion Small Pendant

Item # KW 5721-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

22. Insert driver (O) into the mounting plate bracket.
23. Install driver housing (N), canopy (G) to mounting plate (B) and secure with collar ring (H).

Care Instructions: Clean only with a soft dry cloth or feather duster. Do Not use abrasive or chemical agents.